



Izerwaren
Order #

44.129.508 **Door Dogging Device** Left hand
single side
satin 304 stainless steel

44.129.308 Polished 304 stainless steel

44.130.508 **Door Dogging device**
Right hand (depicted)
single side
satin polished 304 stainless steel

44.129.308 Polished Stainless Steel

44.128L.508 **Angle strike** LEFT
Satin 304 stainless steel
44.128L.308 Polished 304 Stainless Steel



LEFT hand


44.128R.508 **Angle strike** RIGHT
Satin 304 Stainless Steel
44.128R.308 Polished 304 Stainless Steel



RIGHT Hand


44.537.308 **Double strike** Polished
28 x 75 x 25 mm

44.537.508 **Double strike** Satin
For double sided door toggle #44.131
304 Stainless Steel




44.131.508 **Toggle device , double sided**
Satin Stainless Steel
door thickness: 45 mm / 1 3/4 inch
Lever: 190 mm 7 1/2 inch
distance to locking plate: 70 mm 2 3/4 inch
satin polished 304 stainless steel
Felt washers included for fastening roses.
Both handed

44.131.308 **Toggle device , double sided**
Polished Stainless Steel





90 degree turn only



#44.130.308 Medium duty 304 stainless steel door dogging device
90 degree turn only

Polished Stainless Steel finish (right hand depicted)
Angle strike 44.128R (right hand)
This setup pulls the door closed.

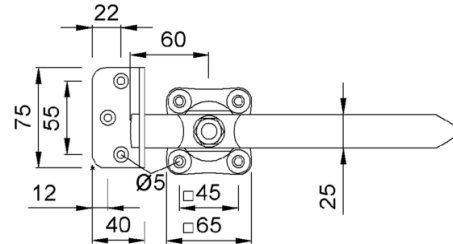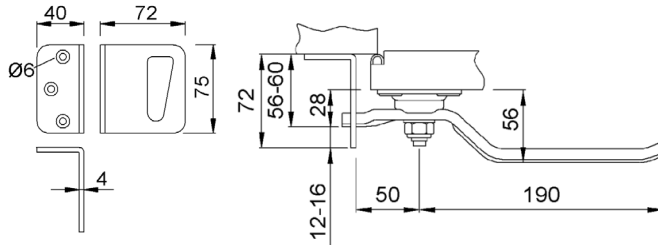

right hand setup depicted with bracket mounted outward

**DEPENDING ON THE LAYOUT ALL BRACKETS APPLICABLE TO EITHER DEVICE
ALL DEVICES DEPICTED TURN 90 DEGREE ONLY**



44.131 Door dogging device; Double sided medium duty
304 stainless steel

90 degree turn only For door thickness 1 3/4 inch
with double with double sided strike #44.537

